


Designed in New Zealand for New Zealand

FIREFOX

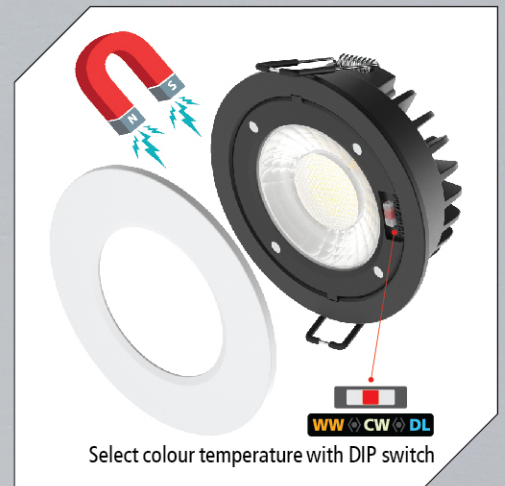

GDL865

RECESSED FIREPROOF LED DOWNLIGHT

Low depth (39mm) down light, fire rated for 90 minutes that comply with AS1530.40.



Body in die cast aluminium, powder coated in white with easy to install magnetic bezel.

The high transmission wide beam angle, 60 degree, PC lens provide high lumen output covering larger surface area.

The 12 w LED lamp can be altered between 3000k, 4000k or 6000k with a DIP switch. The lamp can be dimmed with a pre-wired trailing edge dimmable driver that is integral with the fitting.

With its versatility the product can be used in any indoor environment.



FIREFOX

RECESSED FIREPROOF LED DOWNLIGHT

GDL865




FEATURES

- Die-casting aluminium body
- Powder coated finish
- High transmittance PC lens
- Easy fit magnetic bezel
- Trailing edge dimmable driver included, pre-wired
- Select colour temperature with DIP switch
- Fire rated 90 minutes complies with AS1530.4
- Life lifespan: 50000hrs @ L70, Ta 25°C
- Ta: -20 to +40°C



DIMENSION

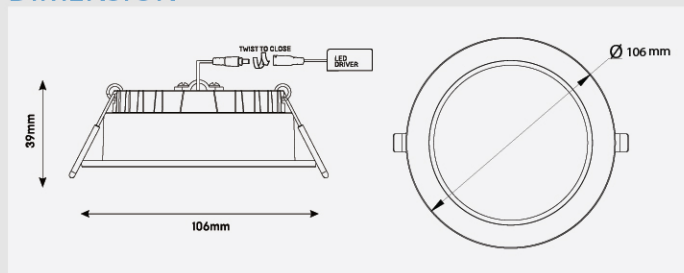

OPTIONS

- FITTING COLOUR: Black

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL865 TC WH	230	12	900/1000/950	3000/4000/6000	60	106×39	90	White	30

Specifications above are for reference only and may vary without prior notice