




NSG TRADING LTD

Designed in New Zealand for New Zealand

MERCURY

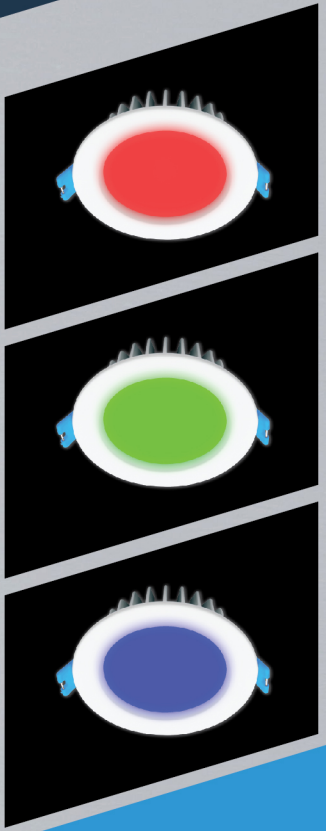

GDL808 RGBCW SMART RGBCW LED DOWNLIGHT



Mercury smart down light for 11W RGBCW Lamp and integral dimmable driver, pre wired, plug in facility for easy installation.

With 100 degree wide beam angle the down light is best suited for ambient / general lighting applications.

The colour and brightness of the down light can be controlled via GLIGHT app. Other features include Sync function, Timer function, Schedule function, Scene function and Voice control function when using GLIGHT app. Please contact GLIGHT to know more about the different options and a demo.






MERCURY

SMART RGBCW LED DOWNLIGHT

GDL808 RGBCW

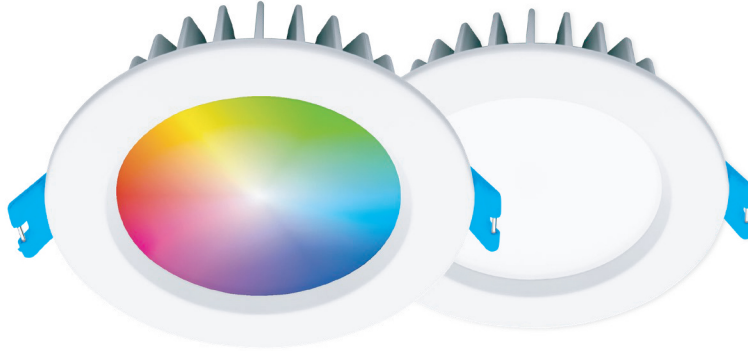


FEATURES

- Smart LED Downlight colour and brightness controlled via G-LIGHT APP
- Standard RGB control and tunable white, adjustable from 2700K ultra warm white to 6500K daylight
- High performance, stable, even light output
- Pre wired for easy installation, plug-in & ready to use

SMART FUNCTIONS WHEN USED WITH G-LIGHT APP:

- **SYNC FUNCTION:** The synchronisation function matches the light transitions to the rhythm of the music.
- **TIMER FUNCTION:** Set light(s) groups to remain on for set period and set a countdown timer (1 min. to 24 hours) until light(s) groups turn off.
- **SCHEDULE FUNCTION:** Set light(s) groups specific time to turn on and off. Required brightness levels can also be selected.
- **GROUP FUNCTION:** Group light(s) together into light(s) groups and control as one.
- **SCENE FUNCTION:** Set a range of scenarios (scenes) by individual light(s) groups and activate with one touch.
- **VOICE CONTROL VIA GOOGLE HOME / AMAZON ALEXA, etc...** (GATEWAY REQUIRED)

DIMENSION

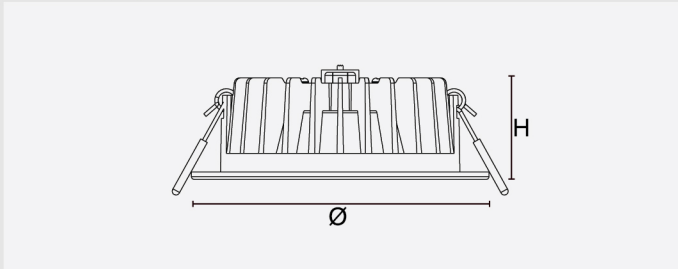

Go to App store (IOS) or Google Play (Android) to download the free G-LIGHT app to your smart phone.
IOS: Requires IOS 6.0 or later. Compatible with iPhone, iPad and iPad touch
Android: Requires Android 4.4 or above, devices must support Bluetooth 4.0



TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL808 RGBCW WH	230	11	R:80 / G:220 / B:55 2700K: 850 / 6500K: 900	RGB + C (6500K) / W (2700K)	100	102.5 X 35	90	White	32

Specifications above are for reference only and may vary without prior notice