


# MIT

SURFACE MOUNTED & SUSPENDED ALUMINIUM PROFILE


## GCL751

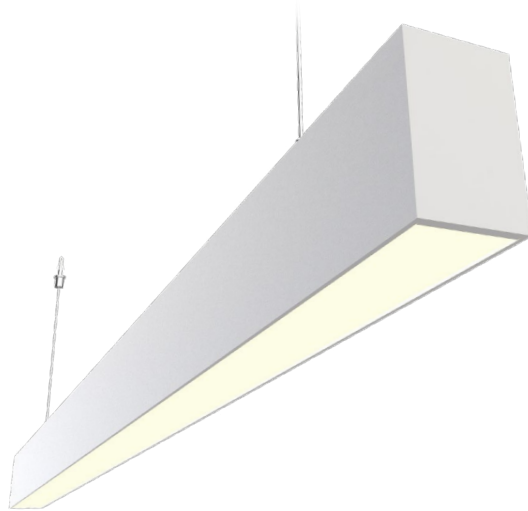


### FEATURES

- Extruded aluminium alloy housing
- Powder coated finish
- High transmittance opal diffuser
- Continuous line by joint connections
- Constant current LED driver fitted
- Change colour temperature by a dip switch
- Lifespan: 50000Hrs @ L70, Ta 25°C
- Ta: -20°C to +50°C

### DIMENSION

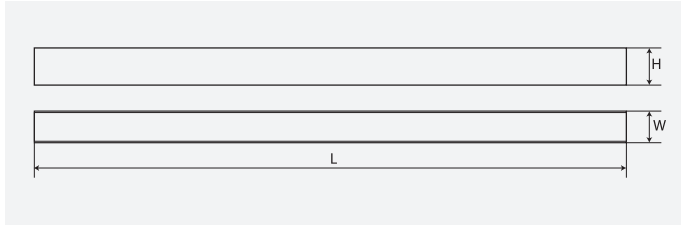


### STRUCTURE

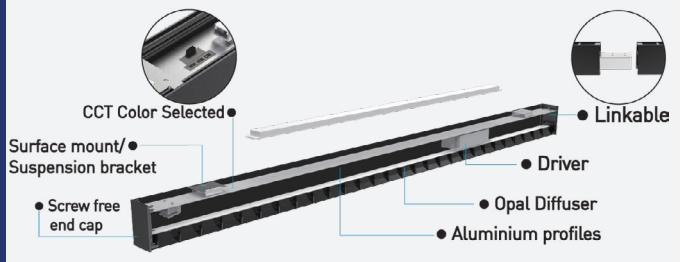


### OPTIONS

- PLUG AND PLAY UP LIGHTING MODULE
- UGR < 19 PRISMATIC DIFFUSER



### ACCESSORIES

- GCL751-752/T BAR CLIPS
- GCL751-CONNECTOR
- SUSPENSION WIRE 1.5M+HANGER BOLT (supplied with fitting)




### TECHNICAL SPECIFICATIONS

| MODEL NO.        | INPUT VOLTAGE (V) | POWER (W) | LUMEN (lm) | COLOUR TEMPERATURE (K) | CRI  | BEAM ANGLE (°) | DIMENSIONS (LxWxH) (mm) | FITTING COLOUR | CARTON QUANTITY |
|------------------|-------------------|-----------|------------|------------------------|------|----------------|-------------------------|----------------|-----------------|
| GCL751/120 TC WH | 230               | 36        | 3600       | 3000/4000/5700         | > 90 | 110            | 1130 x 50 x 72          | White          | 8               |
| GCL751/120 TC BK | 230               | 36        | 3600       | 3000/4000/5700         | > 90 | 110            | 1130 x 50 x 72          | Black          | 8               |

# MIT

SURFACE MOUNTED & SUSPENDED CONTINUOUS ALUMINIUM PROFILE


## GCL752

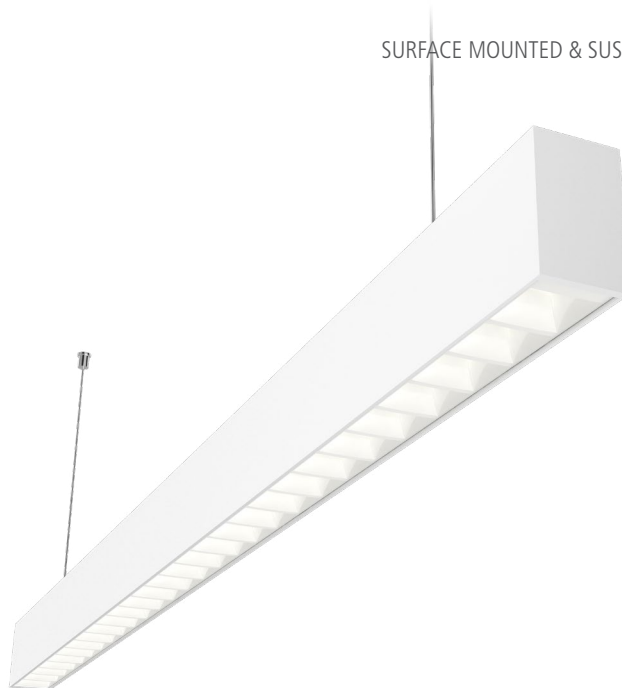

### FEATURES


- Extruded aluminium alloy housing
- Powder coated finish
- High transmittance lens and reflector
- Constant current LED driver fitted
- Continuous line by joint connections
- Change colour temperature by a dip switch
- Lifespan: 50000Hrs @ L70, Ta 25°C
- Ta: -20°C to +50°C

### DIMENSION

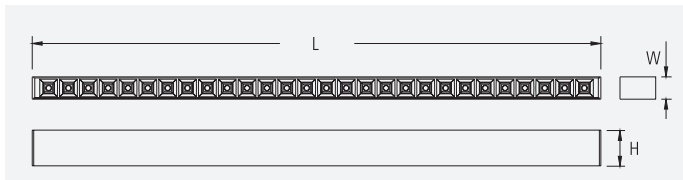


### OPTIONS

- PLUG AND PLAY UP LIGHTING MODULE

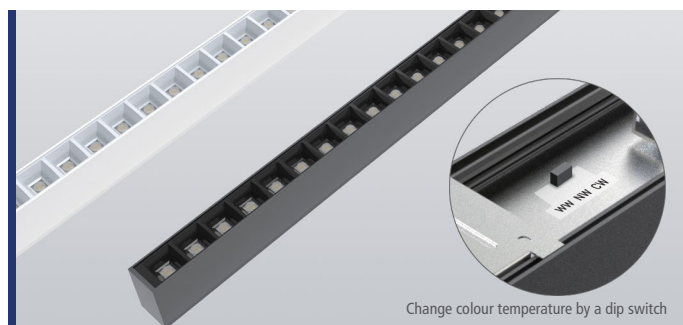


Change colour temperature by a dip switch

### STRUCTURE

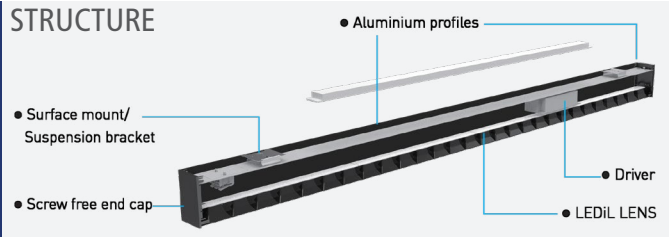

### ACCESSORIES

- GCL751-752/T BAR CLIPS
- GCL752-CONNECTOR
- SUSPENSION WIRE 1.5M+HANGER BOLT (supplied with fitting)



### TECHNICAL SPECIFICATIONS

| MODEL NO.        | INPUT VOLTAGE (V) | POWER (W) | LUMEN (lm) | COLOUR TEMPERATURE (K) | CRI  | BEAM ANGLE (°) | DIMENSIONS (LxWxH) (mm) | FITTING COLOUR | CARTON QUANTITY |
|------------------|-------------------|-----------|------------|------------------------|------|----------------|-------------------------|----------------|-----------------|
| GCL752/120 TC WH | 230               | 30        | 3600       | 3000/4000/5700         | > 90 | 80             | 1146 x 45 x 72          | White          | 1               |
| GCL752/120 TC BK | 230               | 30        | 3600       | 3000/4000/5700         | > 90 | 80             | 1146 x 45 x 72          | Black          | 1               |

Specifications above are for reference only and may vary without prior notice

# MIT

RECESSED CONTINUOUS ALUMINIUM PROFILE


## GCLRC753



### FEATURES


- Extruded aluminium alloy housing
- Electrostatic thermo-painted finish
- High transmittance PMMA diffuser
- Continuous line by joint connections
- Constant current LED driver fitted
- Installation: Recessed
- Lifespan: 50000Hrs @ L70, Ta 25°C
- Ta: -20°C to +50°C

### DIMENSION



### ACCESSORIES

GCLRC753-CONNECTOR



### TECHNICAL SPECIFICATIONS

| MODEL NO.          | INPUT VOLTAGE (V) | POWER (W) | LUMEN (lm) | COLOUR TEMPERATURE (K) | CRI | BEAM ANGLE (°) | DIMENSIONS (L×W×H) (mm) | CUT OUT SIZE (L×W) (mm) | FITTING COLOUR | CARTON QUANTITY |
|--------------------|-------------------|-----------|------------|------------------------|-----|----------------|-------------------------|-------------------------|----------------|-----------------|
| GCLRC753/120 CW WH | 230               | 36        | 3800       | 4000                   | >83 | 90             | 1160 x 90 x 75          | 1150 x 75               | White          | 1               |



### STRUCTURE

