

# ULTRA LONG LED STRIP

**GHR2810**



## FEATURES

- Ultra long can be used in up to 20m runs with a single power feed with no voltage drop
- LED strip covered in a sealed silicone rubber sleeves
- Roll length 20m, cuttable every 100mm at scissors symbol
- Dimmable with compatible controller or dimmable LED driver
- 24V Constant Voltage LED driver required
- Heat-sink recommended
- LED lifespan: 50,000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

## OPTIONS

- **DIMMING:**
  - 1~10V dimming
  - Trailing edge dimming
  - DALI dimming
  - LED Controller: N12-S, AN10 (Refer to page 108-109)
- **EXTRUDED ALUMINIUM CHANNEL / HEATSINK:**




Refer to page 111-112

## DIMENSION



## WIRING DIAGRAM

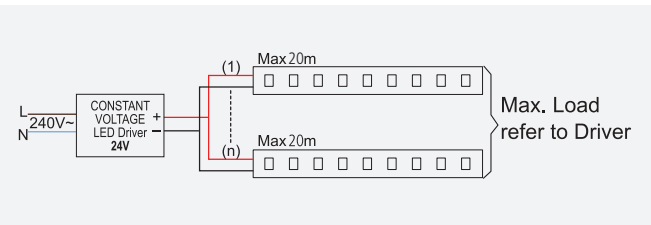

## TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W/m)	LUMEN (lm/m)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (W×H) (mm)	CUTTABLE LENGTH (mm)	LED QUANTITY
GHR2810 WW	24 (DC)	10	1000	3000	>90	120	13 x 5.3	100	70/m
GHR2810 DL	24 (DC)	10	1050	5000	>90	120	13 x 5.3	100	70/m